



POLYFLOR™
COVERING THE WORLD

Classic Mystique PUR

HOMOGENEOUS



Asparagus 1320
Stock: 599 m2



Quartz 1400
Stock: 2,023m2



Steel Parade 1550
Stock: 920 m2



Silver Mist 1430
Stock: 0m2



Rich Chocolate 1520
Stock: 623 m2



Sunblaze 1260
Stock: 231 m2



Ladoga 1410
Stock: 1,240 m2




Soft Almond 1560
Stock: 3.5 m2



Satinwood 1370
Stock: 14 m2



Lemon Zest 1140
Stock: 154 m2

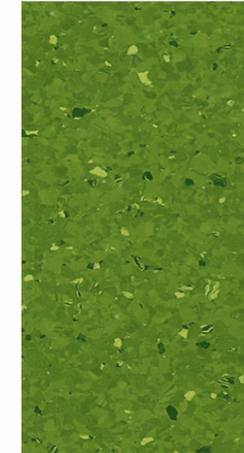

Spring Meadow 1150
Stock: 560 m2

Classic Mystique PUR

Attractive, high performance, heavy duty homogeneous floor covering with a polyurethane reinforcement for low cost, lifetime polish free maintenance.

Featuring a non-directional duotone decoration, with marbleised tonal highlight chips, Classic Mystique PUR is available in a broad palette of stylish colours. Demonstrating outstanding durability and abrasion resistance, Classic Mystique PUR is recommended for use throughout commercial interiors, healthcare and education facilities, as well as retail outlets.



	Gauge	ISO 24346 (EN 428)	2.0mm
	Roll Size	ISO 24341 (EN 426)	2m x 20m = 40m ²
	Tile Size	ISO 24342 (EN 427)	300mm x 300mm = 4.5m ² 608mm x 608mm = 5.17m ²
	Total Weight	ISO 23997 (EN 430)	3250g/m ²
	General Performance	ISO 10581 (EN 649) ASTM F1913 ASTM F1700	Conforms Conforms Class I, Type A
	Use Area	ISO 10874 (EN 685)	
	Slip Resistance	EN 13893 AS 4586 DIN 51130/DIN EN 16165 Ann. B ASTM D2047	Class DS R9 R9 SCOF ≥0.6
	Binder Content	ISO 10581	Type I
	Reaction to Fire	EN 13501-1 ASTM E662 ASTM E648 BCA Spec C1.10 Clause 3 CAN/ULC S102.2 AS ISO 9239-1	Class Bfl-S1 <450 Class 1 Complies FSV < 300; SDV < 500 >8.0 kW/m ²
	Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
	Residual Indentation	ASTM F970 ISO 24343-1 (EN 433)	≤0.005" (750 psi) ≤0.10mm
	Impact Sound Reduction	EN ISO 10140-3	4dB
	Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
	VOC Emissions	Indoor Air Comfort GOLD AgBB/ABG FloorScore Finnish M1 Classification TVOC after 28 days	Eurofins certified product Pass Certified Certified ≤ 10µg/m ³
	Responsible Sourcing	BES 6001	Excellent
	Resistance to Chemicals	ISO 26987 (EN 423) ASTM F925	Good resistance Good
	Light Fastness	ISO 105-B02	≥6

Agrément Assurance - Polyflor Classic Mystique PUR has been independently assessed by the British Board of Agrément and product performance is assured for at least 10 years in recommended use areas. With proper maintenance, the appearance and colour will be retained during this period.


Environmentally Preferable Flooring - Polyflor Classic Mystique PUR achieves a BRE Global Environmental A+ Rating (Certificate No: ENP 472) in major use areas such as education and healthcare and is GreenTag LCA Rate certified with GreenRate level A - Gold Plus. Generic EN 15804 Environmental Product Declaration (EPD) available on request. Polyflor Classic Mystique PUR is 100% recyclable and contains 25% recycled material. Recyclable via the Recofloor scheme. Visit www.polyflor.com/sustainability.

PUR - Polyflor Classic Mystique PUR features a high quality, cross-linked polyurethane reinforcement, UV cured to provide a low-cost, polish free maintenance regime for the lifetime of the flooring.

Bacterial Resistance ISO 846 Part C Does not favour growth
Ease of Radioactive Decontamination ISO 8690 Excellent

Hygiene - All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.

Polyflor homogeneous PUR ranges are compatible for use with the most commonly used alco-based hand gels and are suitable for steam cleaning on a periodic basis. For information regarding handling and installation, adhesives, maintenance, applications, chemical resistance and product warranty, consult **Polyflor Customer Technical Services** on +44 (0)161 767 1912, or email tech@polyflor.com. The data presented is correct at the time of printing. For latest information, please visit our website polyflor.com. Decoration and shade may vary slightly from the samples shown.



Palettone PUR

HOMOGENEOUS



Weekend Sky 8611
Stock: 1,080 m2



Morning Air 8610
Stock: 0 m2




China Clay 8623
Stock: 200 m2



Painters Dream 8612
Stock: 190 m2



Frosted Glass 8606
Stock: 0 m2

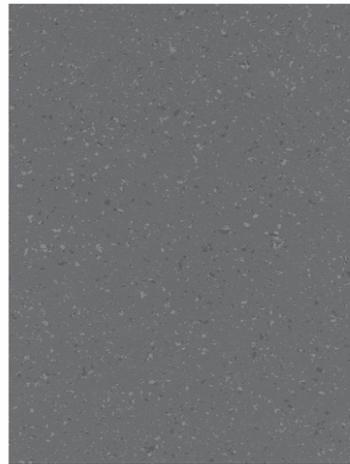

Pencil Lead 8608
Stock: 2,900 m2



Faded-Denim 8613
Stock: 120 m2



Dove Tail 8607
Stock: 0 m2



Deep Space 8609
Stock: 1,260 m2


PALETTONE

Attractive, high performance, heavy duty homogeneous sheet and tile floor covering with a polyurethane reinforcement for low cost, lifetime polish free maintenance.

Featuring a solid colour base with complimentary toned highlights, Palettone PUR is available in a palette of 50 contemporary colours. Demonstrating outstanding durability and abrasion resistance, Palettone PUR is recommended for use throughout commercial interiors, healthcare and education facilities, as well as retail outlets.



	Gauge	ISO 24346 (EN 428)	2.0mm
	Roll Size	ISO 24341 (EN 426)	2m x 20m = 40m ²
	Tile Size	ISO 24342 (EN 427)	608 x 608mm = 5.17m ² (12 shades)
	Total Weight	ISO 23997 (EN 430)	2800g/m ²
	General Performance	EN ISO 10581 (EN 649) ASTM F1913 ASTM F1700	Conforms Conforms Class I, Type A
	Use Area	ISO 10874 (EN 685)	
	Reaction to Fire	EN 13501-1 ASTM E662 ASTM E648 CAN/ULC S102.2 AS ISO 9239-1	Class Bfl-S1 <450 Class 1 FSV < 300; SDV < 500 >8.0 kW/m ²
	Abrasion Resistance	EN 660-2	Group T
	Binder Content	EN ISO 10581	Type I
	Slip Resistance	EN 13893 AS 4586 DIN 51130/DIN EN 16165 Ann. B ASTM D2047	Class DS (dry condition) R10 R10 SCOF ≥0.6
	Residual Indentation	ASTM F970 (Modified) ISO 24343-1 (EN 433)	≤0.005" (750 psi) ≤0.10mm
	Impact Sound Reduction	EN ISO 10140-3	4dB
	Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
	Resistance to Chemicals	ISO 26987 (EN 423) ASTM F925	Good resistance Good
	Light Fastness	ISO 105-B02	≥6
	Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
	VOC Emissions	Indoor Air Comfort GOLD AgBB/ABG FloorScore Finnish M1 Classification TVOC after 28 days	Eurofins certified product Pass Certified Certified ≤ 10µg/m ³
	Responsible Sourcing	BES 6001	Excellent
<p>Environmentally Preferable Flooring - Polyflor Palettone PUR achieves a BRE Global Environmental A+ Rating (Certificate No: ENP 472) in major use areas such as education and healthcare and is GreenTag LCA Rate certified with GreenRate level A - Gold Plus. Generic EN 15804 Environmental Product Declaration (EPD) available on request. Polyflor Palettone PUR is 100% recyclable and contains 25% recycled material. Recyclable via the Recofloor scheme. Visit www.polyflor.com/sustainability.</p> <p>PUR - Polyflor Palettone PUR features a high quality, cross-linked polyurethane reinforcement, UV cured to provide a low-cost, polish free maintenance regime for the lifetime of the flooring.</p>			
	Bacterial Resistance	ISO 846 Part C	Does not favour growth
	Clean Rooms	ISO 14644-1	Class 4
	Ease of Radioactive Decontamination	ISO 8690	Excellent
	Hygiene - All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.		
	Agrément Assurance - Polyflor Palettone PUR has been independently assessed by the British Board of Agrément and product performance is assured for at least 10 years in recommended use areas. With proper maintenance the appearance and colour will be retained during this period.		
	Polyflor homogeneous PUR ranges are compatible for use with the most commonly used alco-based hand gels and are suitable for steam cleaning on a periodic basis. For information regarding handling and installation, adhesives, maintenance, applications, chemical resistance and product warranty, consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com . The data presented is correct at the time of printing. For latest information, please visit our website polyflor.com . Decoration and shade may vary slightly from the samples shown.		
Palettone SD shadecard also available when static control flooring is required.			






Porcelain **3880**
Stock: 536m²



Fossil **3710**
Stock: 80m²

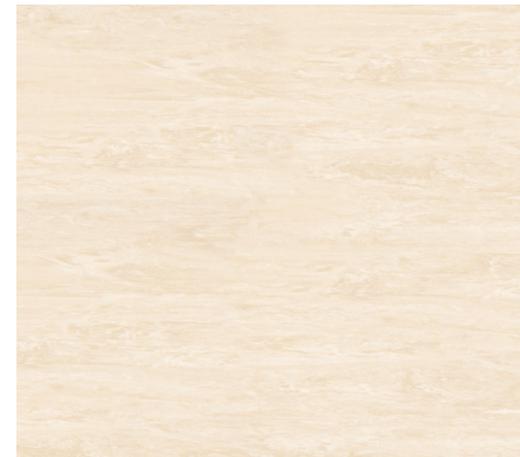


Carnelian Beige **3890**
Stock: 98m²
A L Stock: 1600m²

XL 


Attractive, high performance, heavy duty homogeneous sheet and tile floorcovering with a polyurethane surface treatment which provides an excellent foundation for an easy, ongoing maintenance regime. Featuring a duotone marbled decoration, XL PU is available in a broad palette of vibrant shades.

Demonstrating outstanding durability and abrasion resistance and available in a choice of gauges, XL PU is recommended for public, institutional and commercial buildings as well as hospitals, schools, laboratories and offices.



	Gauge	ISO 24346 (EN 428)	1.5mm 2.0mm
	Roll Size	ISO 24341 (EN 426)	2m x 27.5m = 55m ² 2m x 20m = 40m ²
	Tile Size	ISO 24342 (EN 427)	300mm x 300mm = 4.5m ² 608mm x 608mm = 5.17m ²
	Total Weight	ISO 23997 (EN 430)	2360g/m ² 3200g/m ²
	General Performance	EN ISO 10581 (EN 649) ASTM F1913 ASTM F1700	Conforms Conforms Class I, Type A
	Use Area	ISO 10874 (EN 685)	 1.5mm 2.0mm
	Reaction to Fire	EN 13501-1 ASTM E662 ASTM E648 CAN/ULC S102.2 AS ISO 9239-1	Class Bfl-S1 <450 Class 1 FSV < 300, SDV < 500 > 8.0 kW/m ²
	Abrasion Resistance	EN 660-2	Group M
	Binder Content	EN ISO 10581	Type II
	Slip Resistance	EN 13893 DIN 51130/DIN EN 16165 Ann. B AS 4586 ASTM D2047	Class DS R9 R9 SCOF ≥0.6
	Residual Indentation	ASTM F970 (Modified) ISO 24343-1 (EN 433)	≤0.005" (750psi) ≤0.10mm
	Impact Sound Reduction	EN ISO 10140-3	4dB
	Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
	Resistance to Chemicals	ISO 26987 (EN 423)	Good resistance
	Light Fastness	ISO 105-B02	(Method 3) ≥6
	Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
	VOC Emissions	Indoor Air Comfort GOLD AgBB/ABG FloorScore Finnish M1 Classification	Eurofins certified product Pass Certified Certified
	Responsible Sourcing	BES 6001	Excellent
	Environmentally Preferable Flooring - Polyflor XL PU* achieves a BRE Global Environmental A+ Rating (Certificate No: ENP 472*) in major use areas such as education and healthcare and is GreenTag LCA Rate certified with GreenRate level A - Gold Plus*. Generic EN 15804 Environmental Product Declaration (EPD) available on request. XL PU is 100% recyclable and contains 25% recycled material. Recyclable via the Recofloor scheme. Visit www.polyflor.com/sustainability .		
	Bacterial Resistance	ISO 846 Part C	Does not favour growth
	Ease of Radioactive Decontamination	ISO 8690	Excellent
	Hygiene - All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.		
	Polyflor homogeneous PUR, heterogeneous PUR and Polysafe safety flooring ranges are compatible for use with the most commonly used alco-based hand gels. Some alco-based hand gels contain a high concentration of ethanol and to discuss their compatibility with XL PU, contact Polyflor Customer Technical Services. For information regarding handling and installation, adhesives, maintenance, applications, chemical resistance and product warranty consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com . The data presented is correct at the time of printing. For latest information, please visit our website polyflor.com . Decoration and shade may vary slightly from the samples shown.		

Prestige PUR

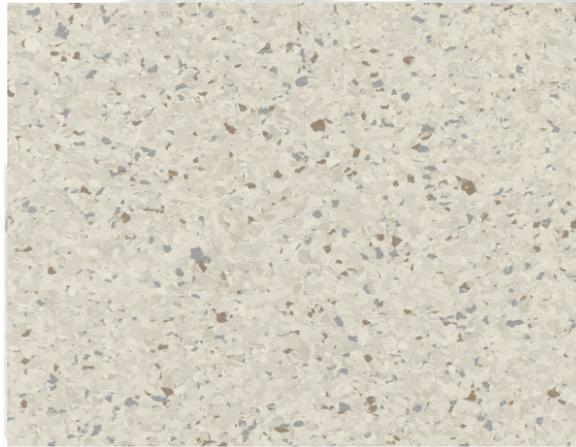

Alabaster 1600
Stock: 80 m2



Nutmeg 1910
Stock: 0 m2
A L Stock: 1,280 m2

HOMOGENEOUS

Prestige PUR | Pearlazzo PUR

High performance, heavy duty homogeneous floor coverings with a polyurethane reinforcement for low cost, lifetime polish free maintenance. Prestige PUR features a non-directional duotone decoration, with tonal highlight chips and Pearlazzo PUR features a unique decoration comprising a blend of tonal chips and pearlescent flakes. Achieving BRE Global Environmental A+ Rating (ENP 472) in major sectors such as health, education and retail, Prestige and Pearlazzo are 100% recyclable and contain 25% recycled material.



Prestige PUR

	Gauge	ISO 24346 (EN 428)	2.0mm
	Roll Size	ISO 24341 (EN 426)	2m x 20m = 40m ²
	Total Weight	ISO 23997 (EN 430)	2950/m ²
	General Performance	EN ISO 10581 (EN 649) ASTM F1913	Conforms Class I, Type A
	Use Area	ISO 10874 (EN 685)	
	Reaction to Fire	EN 13501-1 ASTM E662 ASTM E648 CAN/ULC S102.2 AS ISO 9239-1	Class Bfl-S1 <450 Class 1 FSV < 300; SDV < 500 >8.0 kW/m ²
	Abrasion Resistance	EN 660-2	Group T
	Binder Content	EN ISO 10581	Type I
	Slip Resistance	EN 13893 DIN 51130 / DIN EN 16165 Ann. B AS 4586 ASTM D2047	Class DS R9 R9 SCOF >0.6
	Residual Indentation	ASTM F970 (Modified) ISO 24343-1 (EN 433)	≤0.005" (750 psi) ≤0.10mm
	Impact Sound Reduction	EN ISO 10140-3	4dB
	Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
	Resistance to Chemicals	ISO 26987 (EN 423) ASTM F925	Good Good
	Light Fastness	ISO 105-B02	≥6
	Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
	Flexibility	ASTM F137	Pass
	VOC Emissions	Indoor Air Comfort GOLD AgBB/ABG FloorScore Finnish M1 Classification TVOC after 28 days	Eurofins certified product Pass Certified Certified ≤10µg/m ³
	Responsible Sourcing	BES 6001	Excellent

Environmentally Preferable Flooring - Prestige PUR and Pearlazzo PUR achieve a BRE Global Environmental A+ Rating (Certificate No: ENP 472) in major use areas such as education and healthcare. Prestige PUR is Green Tag LCA Rate certified with GreenRate level A - Gold Plus, Pearlazzo PUR is certified GreenRate level A - Gold. Generic EN 15804 Environmental Product Declaration (EPD) available on request. Prestige PUR and Pearlazzo PUR are 100% recyclable and contain 25% recycled material. Recyclable via the Recofloor scheme. Visit www.polyflor.com/sustainability.

PUR - Prestige PUR and Pearlazzo PUR features a high quality, cross-linked polyurethane reinforcement, UV cured to provide a low-cost, polish free maintenance regime for the lifetime of the flooring.

Bacterial Resistance - ISO 846 Part C
Does not favour growth


Ease of Radioactive Decontamination - ISO 8690
Excellent

Hygiene - All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.

Agrément Assurance - Prestige PUR and Pearlazzo PUR have been independently assessed by the British Board of Agrément and product performance is assured for at least 10 years in recommended use areas. With proper maintenance, the appearance and colour will be retained during this period.

Polyflor homogeneous PUR ranges are compatible for use with the most commonly used alco-based hand gels and are suitable for steam cleaning on a periodic basis. For information regarding handling and installation, adhesives, maintenance, applications and product warranty, consult **Polyflor Customer Technical Services** on +44 (0)161 767 1912, or email tech@polyflor.com.

The data presented is correct at the time of printing. For latest information, please visit our website polyflor.com.
Decoration and shade may vary slightly from the samples shown.



Standard XL

HOMOGENEOUS




►Dove White **8740**
Stock: 198 m2



►Black Panther **8640**
Stock: 190 m2



Desert Sand **9180**
Stock: 9 m2



Black Cherry **8580**
Stock: 8 m2



Conifer **9220**
Stock: 479 m2



Atlantic Blue **9170**
Stock: 8 m2



Eau de Nil **9080**
Stock: 354 m2

Standard XL

Attractive, high performance, heavy duty homogeneous floor covering available in a choice of gauges to suit the application. Featuring a duotone marbled decoration, Standard XL is available in a palette of practical and versatile shades.

Demonstrating outstanding durability and abrasion resistance, Standard XL is recommended for use in public, institutional and commercial buildings where long life under heavy traffic is required.



	Gauge	ISO 24346 (EN 428)	1.5mm, 2.0mm, 2.5mm 3.0mm
	Roll Size	ISO 24341 (EN 426)	1.5mm: 2m x 27.5m = 55m ² 2.0mm: 2m x 20m = 40m ² 2.5mm: 2m x 15m = 30m ² 3.0mm: 2m x 13m = 26m ²
	Tile Size	ISO 24342 (EN 427)	2.0mm: 300mm x 300mm = 4.5m ² 2.0mm: 608mm x 608mm = 5.17m ²
	Total Weight	ISO 23997 (EN 430)	1.5mm: 2360g/m ² 2.0mm: 3200g/m ² 2.5mm: 4200g/m ² 3.0mm: 5010g/m ²
	General Performance	ISO 10581 (EN 649) ASTM F1913 ASTM F1700	Conforms Conforms Class I, Type A
	Use Area	ISO 10874 (EN 685)	 1.5mm 2.0mm, 2.5mm, 3.0mm
	Reaction to Fire	EN 13501-1 ASTM E662 ASTM E648 CAN/ULC S102.2 AS ISO 9239-1	Class Bfl-S1 <450 Class 1 FSV < 300, SDV < 500 >8.0 kW/m ² 1.5mm, 2.0mm 1.5mm, 2.0mm 2.0mm
	Abrasion Resistance	EN 660-2	Group M
	Binder Content	EN ISO 10581	Type II
	Slip Resistance	EN 13893 DIN 51130 / DIN EN 16165 Ann. B AS 4586 ASTM D2047	Class DS R9 R9 SCOF ≥0.6
	Residual Indentation	ASTM F970 (Modified) ISO 24343-1 (EN 433)	≤0.005" (750 psi) ≤0.10mm 1.5mm, 2.0mm
	Impact Sound Reduction	EN ISO 10140-3	4dB 2.0mm
	Static Electrical Propensity	EN 1815	≤2.0kV Classified as 'antistatic'
	Resistance to Chemicals	ISO 26987 (EN 423)	Good resistance
	Light Fastness	ISO 105-B02	≥6
	Castor Chair (continuous use)	ISO 4918 (EN 425)	Suitable
	VOC Emissions	Indoor Air Comfort GOLD AgBB/ABG FloorScore Finnish MI Classification	Eurofins certified product Pass Certified Certified 1.5mm, 2.0mm 1.5mm, 2.0mm
	Responsible Sourcing	BES 6001	Excellent
Environmentally Preferable Flooring - Polyflor Standard XL achieves a BRE Global Environmental A+ Rating (Certificate No: ENP 472) in major use areas such as education and healthcare and is GreenTag LCA Rate certified with GreenRate level A - Gold Plus. * Generic EN 15804 Environmental Product Declaration (EPD) available on request. Standard XL is 100% recyclable and contains 25% recycled material. Recyclable via the Recofloor scheme. Visit www.polyflor.com/sustainability . * 2.0mm			
	Hygiene - All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection. Polyflor homogeneous PUR, heterogeneous PUR and Polysafe safety flooring ranges are compatible for use with the most commonly used alcho-based hand gels. Some alcho-based hand gels contain a high concentration of ethanol and to discuss their compatibility with Standard XL, contact Polyflor Customer Technical Services. For information regarding handling and installation, adhesives, maintenance, applications, chemical resistance and product warranty, consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com . The data presented is correct at the time of printing. For latest information, please visit our website polyflor.com . Decoration and shade may vary slightly from the samples shown.		

