


# STONEHENGE

Click LVT



Designed in Scotland



**Prestigeflor**  
Flooring with prestige touch...!



**PF-LVT-501**



Size : 1220 mm X 180 mm





**PF-LVT-502**



Size : 1220 mm X 180 mm





**PF-LVT-503**



Size : 1220 mm X 180 mm






**PF-LVT-504**




Size : 1220 mm X 180 mm

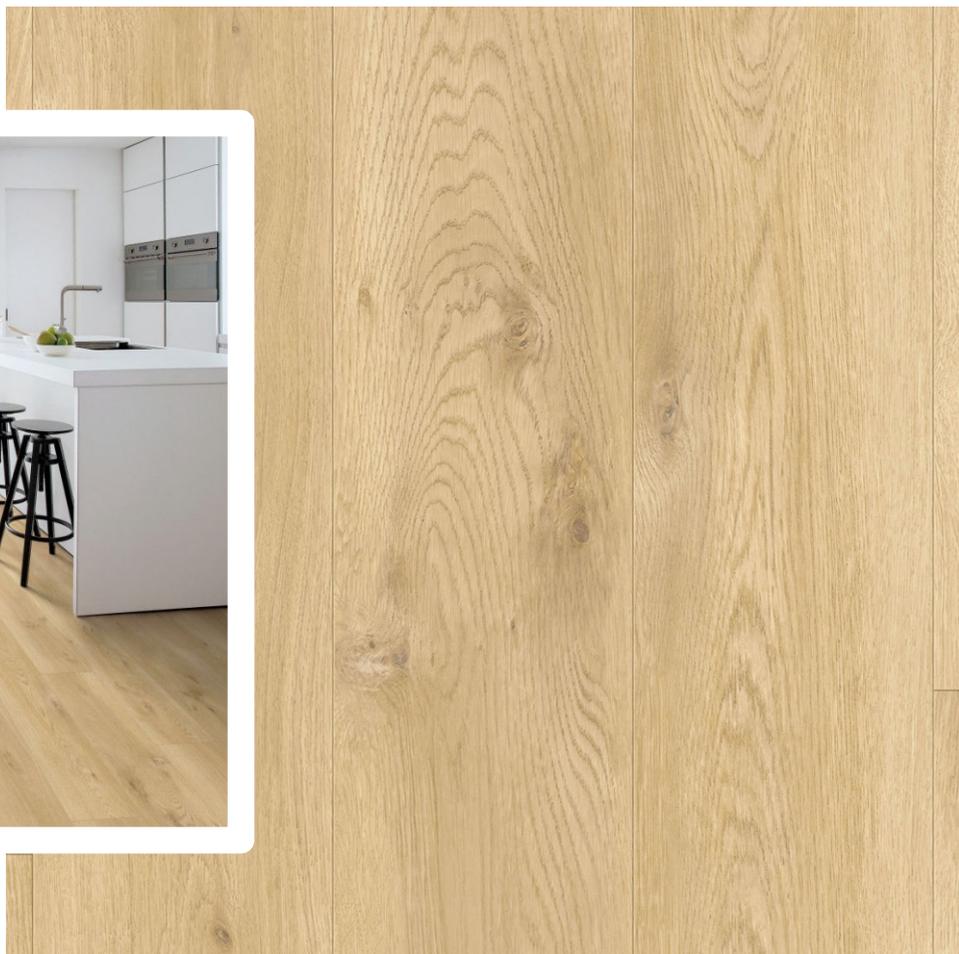



**PF-LVT-505**

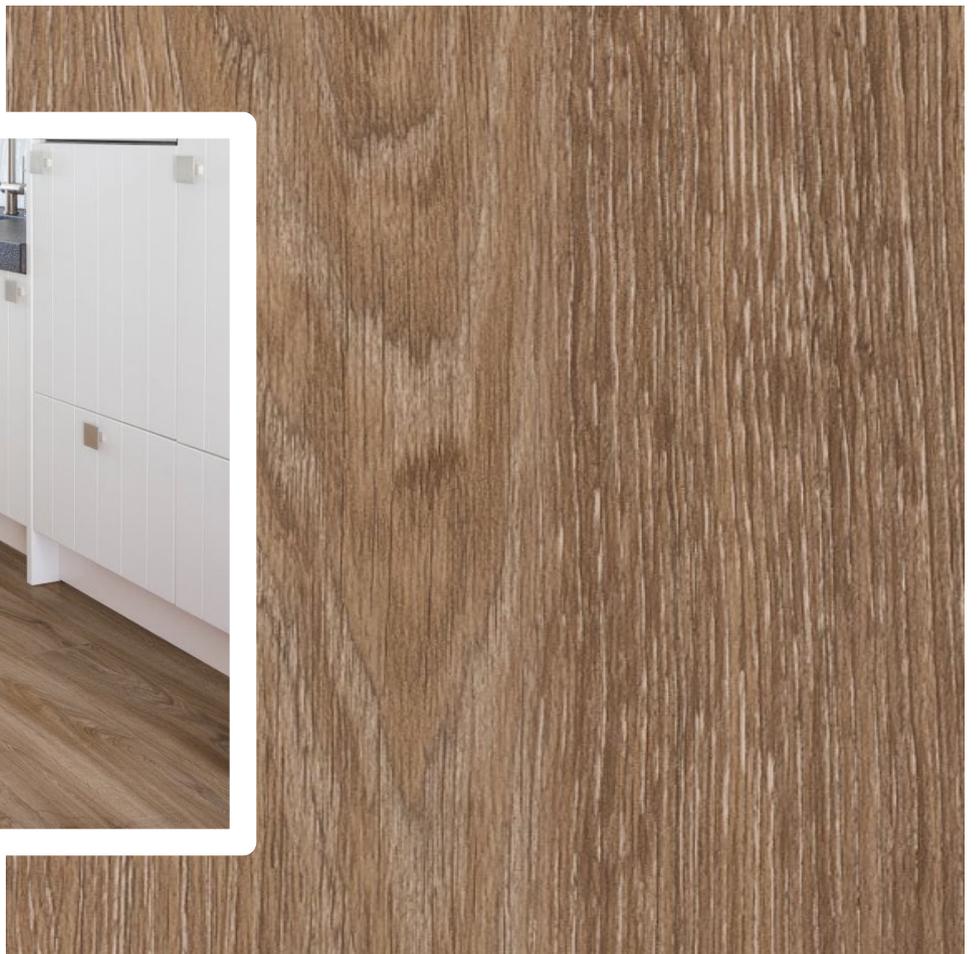

Size : 1220 mm X 180 mm





**PF-LVT-507**



Size : 1220 mm X 180 mm








**PF-LVT-508**



Size : 600 mm X 300 mm

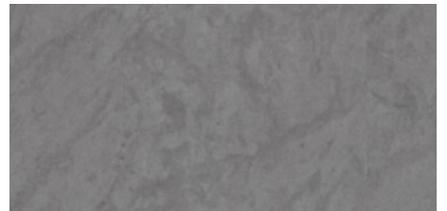
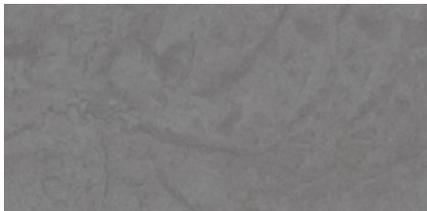
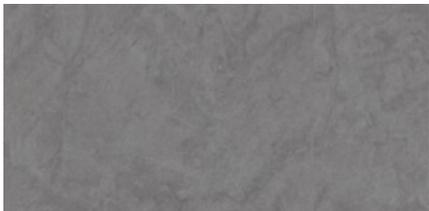




**PF-LVT-509**



Size : 600 mm X 300 mm

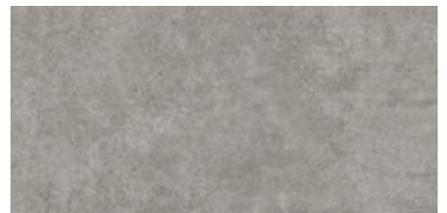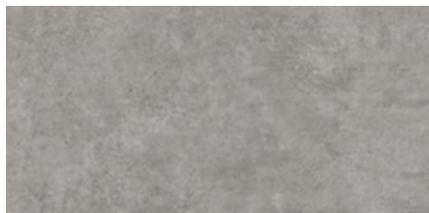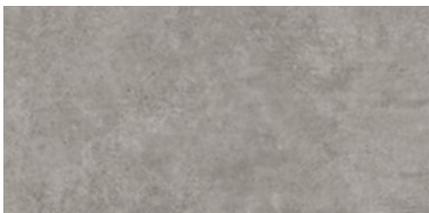




**PF-LVT-510**



Size : 600 mm X 300 mm

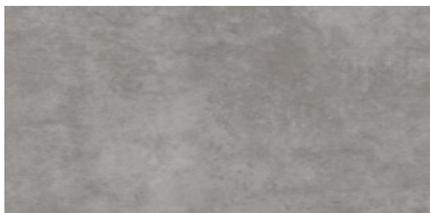


VOC FREE



GREEN



## CROSS-SECTIONAL DETAILS OF STONEHENGE LVT

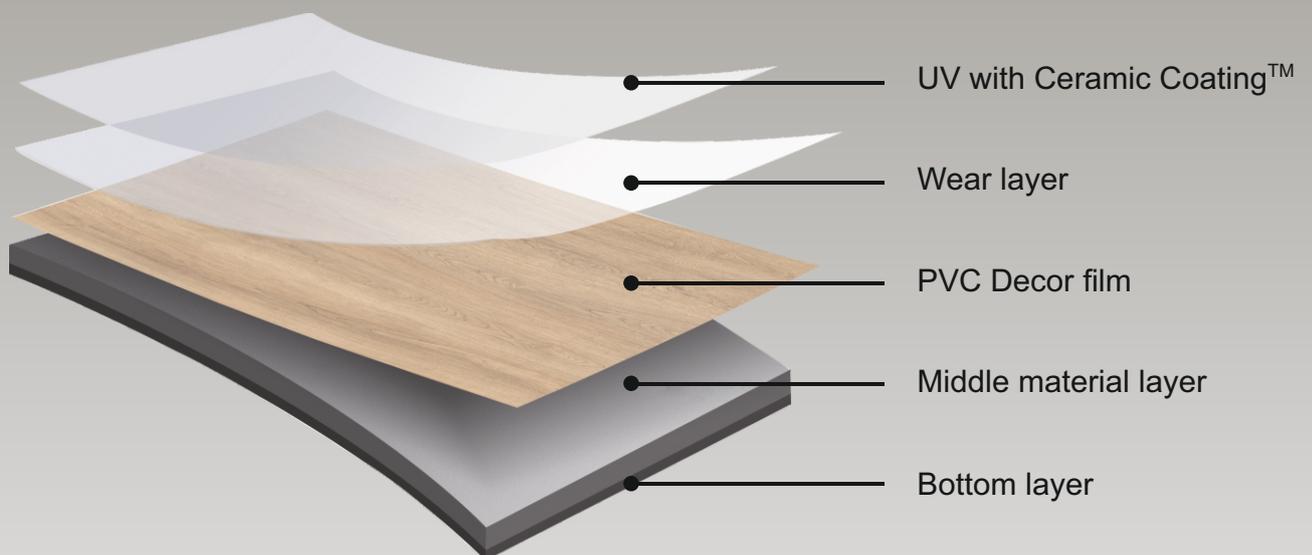

**For the  
Beauty of  
real Wood**



# TECHNICAL SPECIFICATION

Total thickness	EN-ISO 24346	5mm
Wear layer thickness	EN-ISO 24340	0.5mm
Size		1220x180mm
Domestic use	EN-ISO 10874	Class 23
Commercial use	EN-ISO 10874	Class 33
Light industrial use	EN-ISO 10874	Class 42
Total weight	ISO 23997	8300 g/m <sup>2</sup> ± 5%
Wear layer binder content	EN-ISO 10582	Class 1
Dimensional Stability	EN-ISO 23999	0.05%
Straightness & squareness	EN-ISO 24342	<400 mm < 0.25 mm / >400 mm < 0.35 mm
Slip resistance	DIN 51130	R10
Castor chair	ISO 4918	Pass
Color fastness	EN ISO 105-B02	≥ 6
Resistance to Chemical	EN-ISO 26987	Very good
Acoustic properties	EN-ISO 717-2	Upto 15 db with 2mm underlay
Indoor Air emission	EN 16516	≤ 0.02 mg/m <sup>3</sup>
Recyclable content	Upto 60% in backing material	
Reaction to fire	EN 13501-1	Bfl-s1, L, NCS with and without underlay
Thermal conductivity	EN 12524	0.25 W/mK
Body voltage	EN 1815	≤ 2.0 kV
Warranty	10 years residential & 7 years commercial	

PHTHALATE FREE . FLOOR SCORE . 100% STABILITY . NO EXPANSION . NO CONTRACTION



8 Iris Ave, Glasgow G45 OEW, UK  
[www.prestigeflor.com](http://www.prestigeflor.com)