



Prestigeflor
Flooring with prestige touch..!

STIRLING

CLICK SPC





Designed in Scotland

VOC FREE



CROSS-SECTIONAL DETAILS OF STIRLING SPC

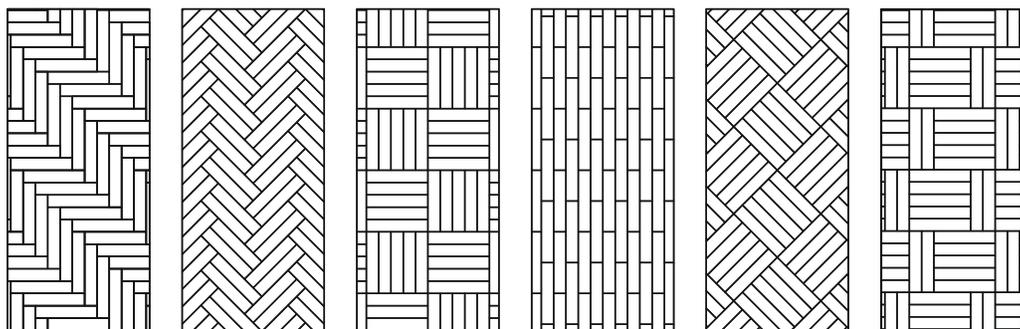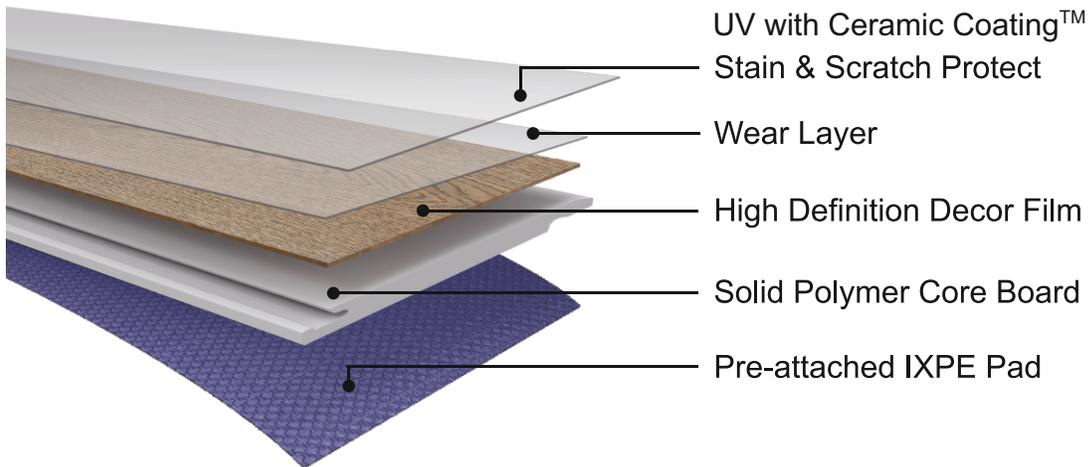

635mm*127mm*5mm (0.5mm wear Layer) + 1mm IXPE





Prestigeflor
Flooring with prestige touch..!



PF-SPC-611





Prestigeflor
Flooring with prestige touch..!



PF-SPC-612





Prestigeflor
Flooring with prestige touch..!



PF-SPC-613





Prestigeflor
Flooring with prestige touch..!




PF-SPC-614





PF-SPC-615

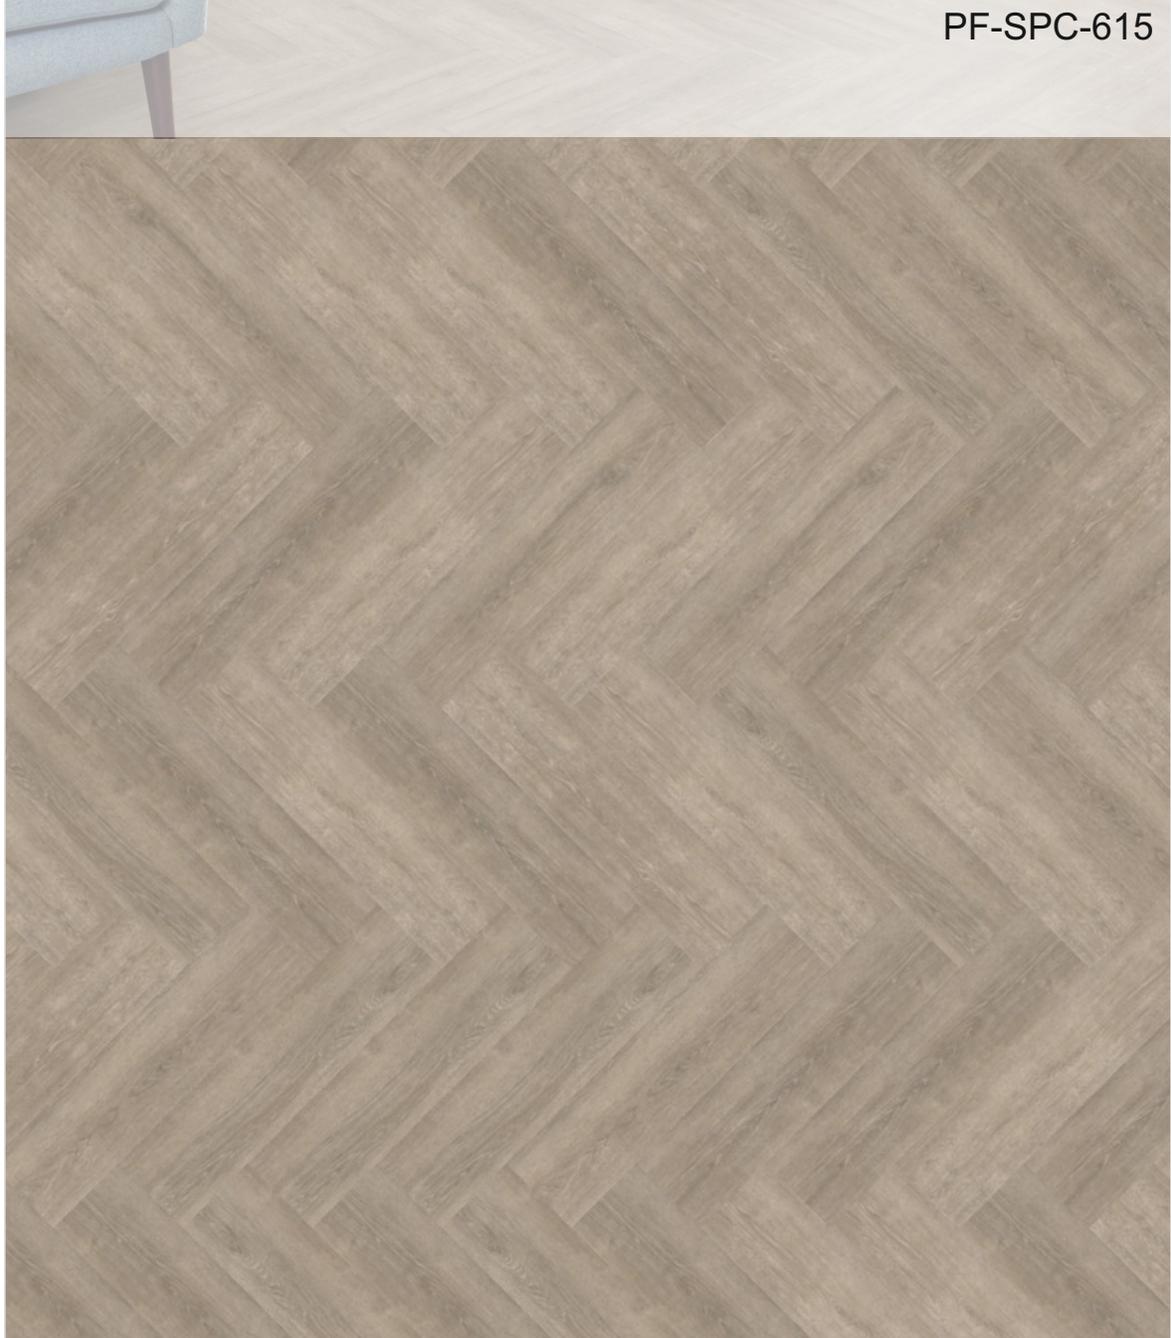



Prestigeflor
Flooring with prestige touch..!



PF-SPC-616





Prestigeflor
Flooring with prestige touch..!



PF-SPC-617





Technical Data

Item	Test Standard	Requirement	Result
Appearance	EN 649	No chipping, cracking, visual texture, delamination, bubbles, shallow embossing, scratches, dirt, poor cut, etc.	Pass
Size		635mm*127mm*5mm + 1mm IXPE	Pass
Stability	EN426	Length \pm 0.20mm, Width \pm 0.10mm	Pass
Thickness	EN428	+0.13mm, -0.10mm	Pass
Squareness	EN427	\leq 0.15mm	Pass
Residual Indentation	EN433	\leq 0.15mm	Pass
Dimension Stability	EN434	\leq 0.25%	Pass
Curling	EN434	\leq 2.0mm	Pass
Resistance to Chemicals	EN423	Refer to Standard	Pass
Thickness of wear layer	EN429	\pm 0.02mm	Pass
Peel Strength	EN431	\geq 1.0kgf/cm	Pass
Density	EN436	Refer to Standard	Pass
Weight in total	EN430	Refer to Standard	Pass
Castor chair resistance	EN425	No disturbance, No delamination	Pass
Flexibility	EN435	No crack found	Pass

PHTHALATE FREE . FLOOR SCORE . 100% STABILITY . NO EXPANSION . NO CONTRACTION



8 Iris Ave, Glasgow G45 0EW, UK
www.prestigeflor.com